


SUB BOTTOM PROFILING

AAE 8 & 20 ELEMENT HYDROPHONE STREAMERS



- **High quality, complete 8 & 20 Element Hydrophone Streamers.**
- **Kerosene filled for neutral buoyancy.**
- **Supplied with a robust 50-metre tow-leader as standard.**
- **Comes complete with pre-amp and easily replaceable alkaline battery.**
- **Extensively field proven to offer consistently high quality results.**

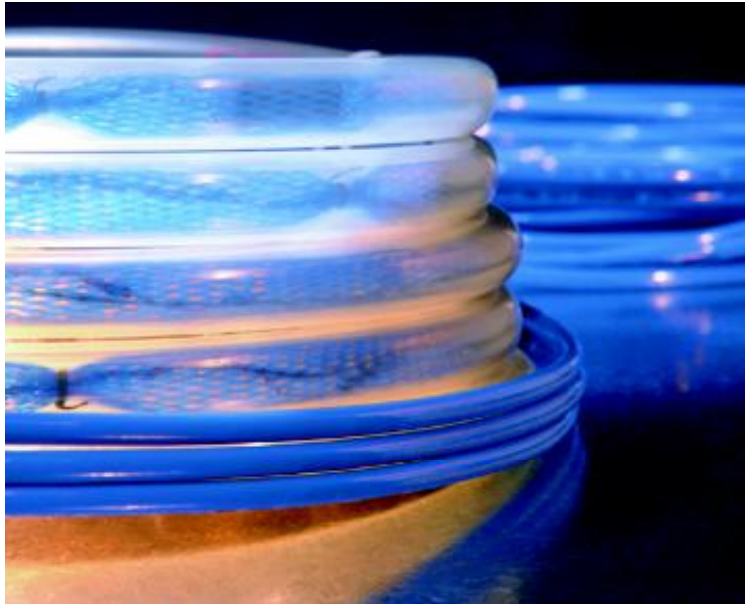

HYDROPHONE LENGTH (8 & 20 EL' VARIANTS)	:4.5 METRES
HYDROPHONE ELEMENT SPACING ON	:8 ELEMENT VARIANT = 365mm 20 ELEMENT = 150mm
FREQUENCY RESPONSE	:20Hz – 10kHz (-3dB)
OVERALL HYDROPHONE SENSITIVITY (8 ELEMENT)	:MINUS 176dB REF 1v PER MICRO PASCAL
OVERALL HYDROPHONE SENSITIVITY (20 ELEMENT)	:MINUS 167dB REF 1v PER MICRO PASCAL
COMES WITH ROBUST TOW LEADER – STANDARD LENGTH (50 METRES) OR LENGTH OF CHOICE	
WEIGHT IN AIR	:5KG (8 ELEMENT)
WEIGHT IN AIR	:7.5 KG (20 ELEMENT)
COMES WITH USER REPLACEABLE 9v ALKALINE BATTERY (DURACELL TYPE MN 1604)	

July 2001



Marine House, Marine Park, Gapton Hall Road, Great Yarmouth, NR31 0NL, England
Tel: + 44 (0) 1493 440355 Fax: + 44 (0) 1493 440720
www.appliedacoustics.com email: general@appliedacoustics.com

Due to continual product improvement these specifications may be subject to change without notice.