

# WIND DISPLAY OMC-138



## WIND DISPLAY OMC-138

- Easy read-out of wind information
- LED circles for wind direction and variation 36 leds
- Scaling in m/s, km/h, kts, mph and Beaufort
- Selectable averaging interval time, 2 min. 10 min. or user programmable
- Additional indication of gust and minimum wind speed
- Serial and analogue outputs (optional)
- Brightness control
- Compatible with several wind sensors

 **OBSERVATOR**  
Instruments BV

# WIND DISPLAY OMC-138

## GENERAL DESCRIPTIONS

The OMC-138 digital wind display is a combined display for wind speed and wind direction.

The display is housed in a 144 x 144 mm. Din size casing suitable for panel mounting. A table top version is available. Any inclination is allowed and no additional control units are required.

Wind direction is indicated within a double LED circle, with the four wind directions. Each circle consists of 36 LED's for average direction and wind variation. Inside this circles a three digit numeric display indicates the wind speed.

A second three digit display located in the lower right corner provides maximum or minimum wind speed information.

The wind information can be displayed in m/s, km/h, mph or Beaufort. Selection of these units can be made using the front panel buttons. Another MENU option is the choice of the averaging interval, which can be set at 2 minutes, 10 minutes or every other 'user'-programmed interval. When not in the MENU mode the ▲ and ▼ keys are used for brightness control or gust reset.

The unit was primary intended to use with the Obsermet wind sensors, but other, most common sensors can be interfaced to the display.

## DATA SUMMARY

### DISPLAYS

- Double LED circle with 36 LED's
- One 3 digits red LED displays size 14.3 mm height
- One 3 digit red LED display size 10 mm height

### POWER REQUIREMENTS

- 230 VAC, 115 VAC, 24 VDC and 12 VDC optional, 20VA max.

### INPUTS


- 1 digital pulse input
- 1 analogue input (potmeter)
- 1 RS422 or currentloop input

### OUTPUTS

- Daisy chain RS422 or currentloop
- 2 analogue outputs (optional)

### DIMENSIONS

- Size 144 x 144 x 94 mm standard DIN size
- Weight 800 gram
- Maximum panel thickness 8mm

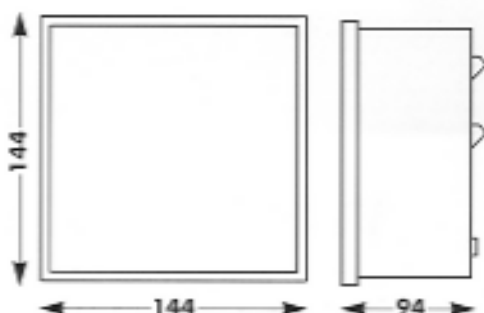

### ENVIRONMENTAL

- Operating temperature -30 to 60 deg. C.
- Moisture protection IP40
- Humidity 5 to 90%
- EMC EN 50081-1 class B, EN 50082-2

### OPTIONAL

- OMC-127 dual analogue outputs 4...20mA or 0...1Volt
- OMC-128 digital output RS422
- OMC-129 remote brightness control
- OMC-775 tabletop housing with bracket

Rietdekkerstraat 6 (Donkersloot Noord)  
2984 BM Ridderkerk - The Netherlands  
P.O. Box 60 - 2980 AB Ridderkerk  
Tel.: +31 (0)180 - 463 411  
Fax: +31 (0)180 - 463 530  
E-mail: info@observator.com

 **OBSERVATOR**  
Instruments BV